




# Galvashield® XP

Tied-on sacrificial anode units for corrosion prevention

## Description

Galvashield XP embedded galvanic anodes are used in concrete rehabilitation to prevent the formation of new corrosion sites on adjacent rebar. The anode consists of a sacrificial zinc core activated within a specially formulated cementitious mortar. The XP unit is fixed to the reinforcing steel by means of tie wires, which allow attachment in horizontal, vertical and overhead locations. Once installed, the zinc core corrodes preferentially to the surrounding rebar, providing 'Cathodic Prevention' and therefore preventing 'Incipient Anode' formation.

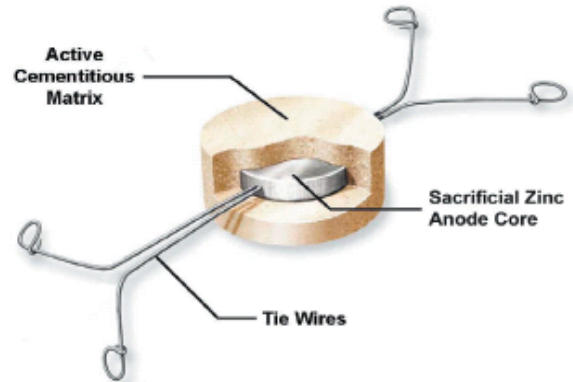

Cut-away of Galvashield XP

## Typical applications

- Patch Repairs.
- Joints between new and existing concrete.
- Pre-stressed Concrete.
- Post-tensioning anchors.

## Advantages

- **Proven technology** - supported by independent test programs. British Board of Agreement and Concrete Innovations Appraisal Service (USA).
- **Quick and easy installation** - requiring no special equipment or training.
- **Zero Maintenance** - Requires no external power source or monitoring.
- **Measurable** - Anode performance can easily be monitored if required.
- **Versatile** - Suitable for chloride contaminated, pre-stressed/ post tensioned and new concrete.
- **Up to 20 years life** - Reduces the need for future repairs.

## How does it work?

Galvashield anodes work on the principle of sacrificial protection. When two dissimilar metals are placed in an electrolyte (in this case within concrete) the most active metal (zinc) will sacrifice itself to protect the more noble (less active) reinforcing steel. Galvashield XP anodes are embedded in patch repairs to provide Cathodic Prevention to the reinforcing steel immediately adjacent to the repair area. They will prevent secondary corrosion to the steel, commonly referred to as the 'Incipient Anode' or 'Ring Effect'.

## Standard compliance / certification

Independently certified performance. British Board of Agreement Certificate (No. 04/4140).

Level of Protection	Description	Galvashield XP
Cathodic Prevention	Preventing new corrosion activity from initiating	✓
Corrosion Control	Significantly reduce ongoing corrosion activity	*
Cathodic Protection	Highest level of protection, intended to stop ongoing corrosion	X

\*Dependant upon XP design and structure

## Specification clause

The sacrificial anode shall be Galvashield XP, a sacrificial metal surrounded by a highly alkaline cementitious mortar, which has a pore solution pH sufficiently high for corrosion of the anode to occur and for passive film formation on the anode to be avoided as described in patent number WO94/29486PCT.

## Application instructions

### Repair preparation

Break out the concrete from around and behind the steel reinforcement in accordance with good concrete repair practice.

All exposed steel reinforcement should be cleaned to a bright condition paying particular attention to the back of exposed steel bars. Abrasive blasting is recommended for this process.

Prior to installation of the XP units, check the continuity of the steel reinforcement. Any loss of continuity will require additional electrical connections or restoration of continuity by effective means.

# Galvashield® XP

## Product application

Select a location for the Galvashield XP as close as practical to the edge of the broken out repair zone and excavate a rebate as required. Galvashield XP units should be positioned around/along the repair boundary.

In addition to standard substrate preparation, the Galvashield XP anode(s) shall be thoroughly pre-soaked in clean water for a minimum of 10 and a maximum of 20 minutes, prior to the application of the repair mortar.

Attach the Galvashield XP anodes immediately following preparation and cleaning of the steel reinforcement. The anode spacing shall be in accordance with the repair specification.

Tighten tie wires using Galvashield Fixing Tool so that no free movement is possible, thus ensuring good electrical continuity. To test electrical continuity between tie wires and reinforcement bar a continuity meter should be used. A value between 0.1 – 1 Ohm shall be achieved.


When required the steel reinforcement should be primed immediately following attachment of the Galvashield XP with a 135 micron (wft) continuous coating of Nitoprime Zincrich.

Over painting with the bonding agent or reinforcement primer, onto the surface of the Galvashield XP unit must be avoided.

The Galvashield XP should be positioned to ensure all round contact with the reinstatement material preventing void formation.

Cover to the Galvashield XP should equal the depth of cover to the steel reinforcement to which it is attached. In no case shall it be less than 20mm for horizontal repairs or 10mm for vertical and overhead repairs.

## Typical layout

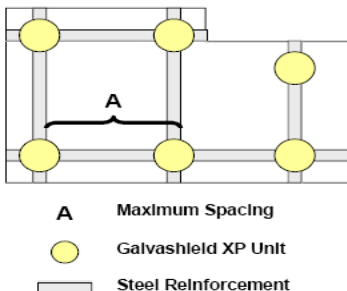

Fosam Company Limited

Head Office  
Post Box 11081  
Jeddah – 21453  
Saudi Arabia

[www.fosroc.com](http://www.fosroc.com)

## Design table – Anode spacing

Steel surface area per m <sup>2</sup> of concrete	Maximum spacing between XP units (A)
< 0.6	610 mm
0.61 – 0.9	500 mm
0.91 – 1.2	430 mm

For greater steel densities contact Fosroc Ltd

## Repair materials

The Galvashield XP should be used in conjunction with Fosroc's extensive range of compatible repair mortars and acrylic bonding/curing agents.

Galvashield XP is not suitable for use with epoxy and polyester repair mortars or primers, as these are non conductive

Blanket galvanic protection of sound but contaminated areas of concrete can be established by the use of Galvashield CC sacrificial anodes (refer to Galvashield CC data sheet).

## Packaging

Galvashield XP 64mm diameter x 27mm thick  
20 units per pack

## Storage

Store in dry conditions in the original unopened box. Shelf life 12 months - see package instructions for details.

Nitoprime Zincrich must be stored in accordance with the Highly Flammable Liquids and Liquefied Petroleum Gases Regulations 1972.

## Precautions

## Health and safety

Galvashield XP should be handled using protective gloves, and other personal protective equipment, as per standard procedures for handling cementitious materials.

Galvashield is a registered trademark for Vector Corrosion Technologies Limited



## Important note:

Fosroc products are guaranteed against defective materials and manufacture and are sold subject to its standard Conditions for the Supply of Goods and Services, copies of which may be obtained on request. Whilst Fosroc endeavours to ensure that any advice, recommendation, specification of information it may give is accurate and correct, it cannot, because it has no direct or continuous control over where or how its products are applied, accept any liability either directly or indirectly arising from the use of its products, whether or not in accordance with any advice, specification, recommendation of information given by it.

Telephone: +966 2 637 5345

Fax: +966 2 637 5891

email: [fosam@fosroc.com](mailto:fosam@fosroc.com)

## Regional Offices

Jeddah Sales Office	Tel: (02) 608 0999	Fax: (02) 638 0693	Yanbu	Tel: (04) 322 4280	Fax: (04) 391 2980
Jeddah Showroom	Tel: (02) 665 0187	Fax: (02) 667 4844	Makkah	Tel: (02) 542 0869	Fax: (02) 542 0869
Riyadh	Tel: (01) 482 9303	Fax: (01) 482 7562	Medinah	Tel: (04) 855 0091	Fax: (04) 855 0047
Dammam	Tel: (03) 814 1282	Fax: (03) 814 1581	Jubail	Tel: (03) 362 3904	Fax: (03) 362 3875
Khamis Mushayt	Tel: (07) 250 0469	Fax: (07) 250 0469	CSD	Tel: (02) 608 0999	Fax: (02) 638 0693

Registered Office: Industrial Area, Phase 4, Road No. 414, Street No. 407